



Linear Actuator

SA with linear thrust units LE

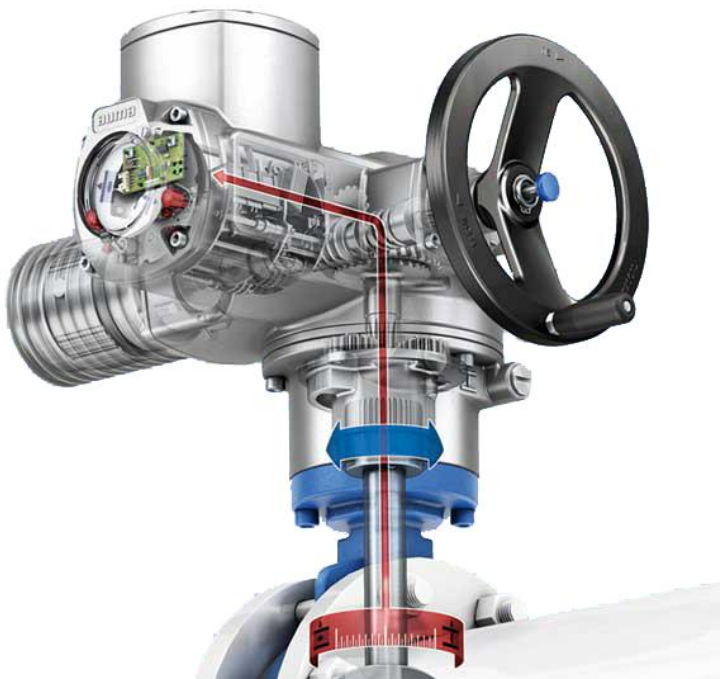

- ❑ Thrusts from 4 kN to 217 kN
- ❑ Strokes up to 500 mm
- ❑ Speeds from 20 mm/min to 360 mm/min
- ❑ Handwheel for manual operation

- ❑ High enclosure protection
- ❑ High quality corrosion protection
- ❑ Wide ambient temperature ranges

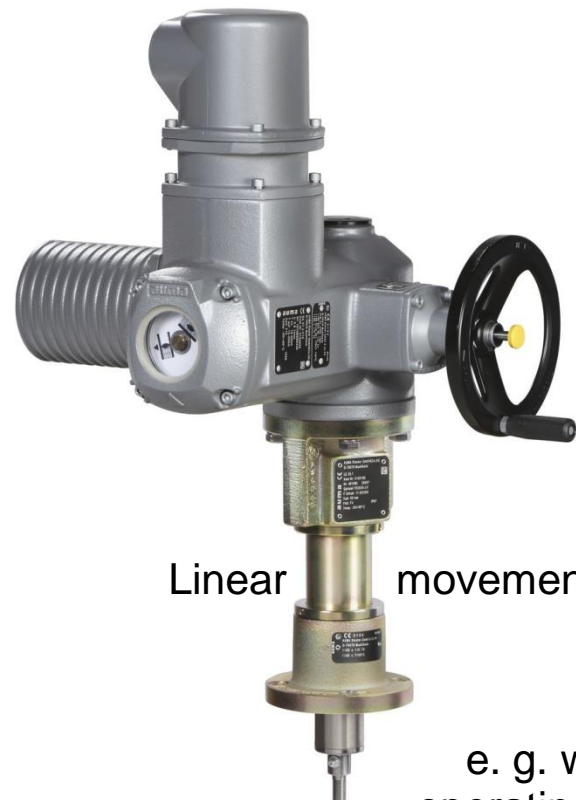

Linear movements

e. g. when
operating globe
valves